



PRODUCT OVERVIEW

The SPX20 is a six input stereo source selector designed to extend the number of monitor returns available on a mixing console. Equally it can be used to select up to 6 music sources and distribute these to 2 zones with separate level control and on-off switching for each zone.

Channel one has an input level control to facilitate on-the-fly adjustment, while the other inputs feature screwdriver level trimmers providing adjustment for +4dBu and -10dBV signal levels and balancing volumes between sources. Additionally channel one features front panel jack sockets in parallel to the rear panel inputs to facilitate direct connection of an instrument.

Inputs are selected by momentary action buttons that also allow more than one input to be selected and mixed to the output. Switching from one source to another is CMOS controlled and silent.

Two separate outputs with level controls and on-off switching provide a means of selecting and balancing levels between different types of monitors. A front panel headphone output is also provided with separate level control.

A master output DIM button provides 20dB of attenuation and a Mono sum switch is provided for connection of mono sources.

SPECIFICATIONS

ELECTRICAL

Frequency response: $\pm 1\text{dB}$, 20Hz to 20kHz
 Distortion: $< 0.01\%$
 Noise: $< -90\text{dB}$ (at unity gain)
 Input impedance: 20k
 Output impedance: $< 100\text{R}$
 Input trim range: $\pm 10\text{dB}$
 Output level 1 & 2: Off to +10dB
 DIM: -20dB

Power Consumption: 7VA, 115/230VAC, 50/60Hz

PHYSICAL

Connector Types:

Input 1: Electronically balanced, XLR-F wired pin 2 = hot
 Input 2 & 3: Electronically balanced, TRS jack wired Tip = hot
 Input 4: Unbalanced, Phono
 Input 5: Unbalanced, Phono
 Input 6: Unbalanced, Phono


Output 1 & 2: Ground sensing, 1/4" TRS jack, wired tip = hot
 Record Out: Phono connector

Power: Detachable Lead, 3 pin IEC

Dimensions: 483mm (19") W
 150mm (6") D
 44mm (1.75")

Weight: Unit 2.2kg
 Shipping 2.85kg

BLOCK DIAGRAM

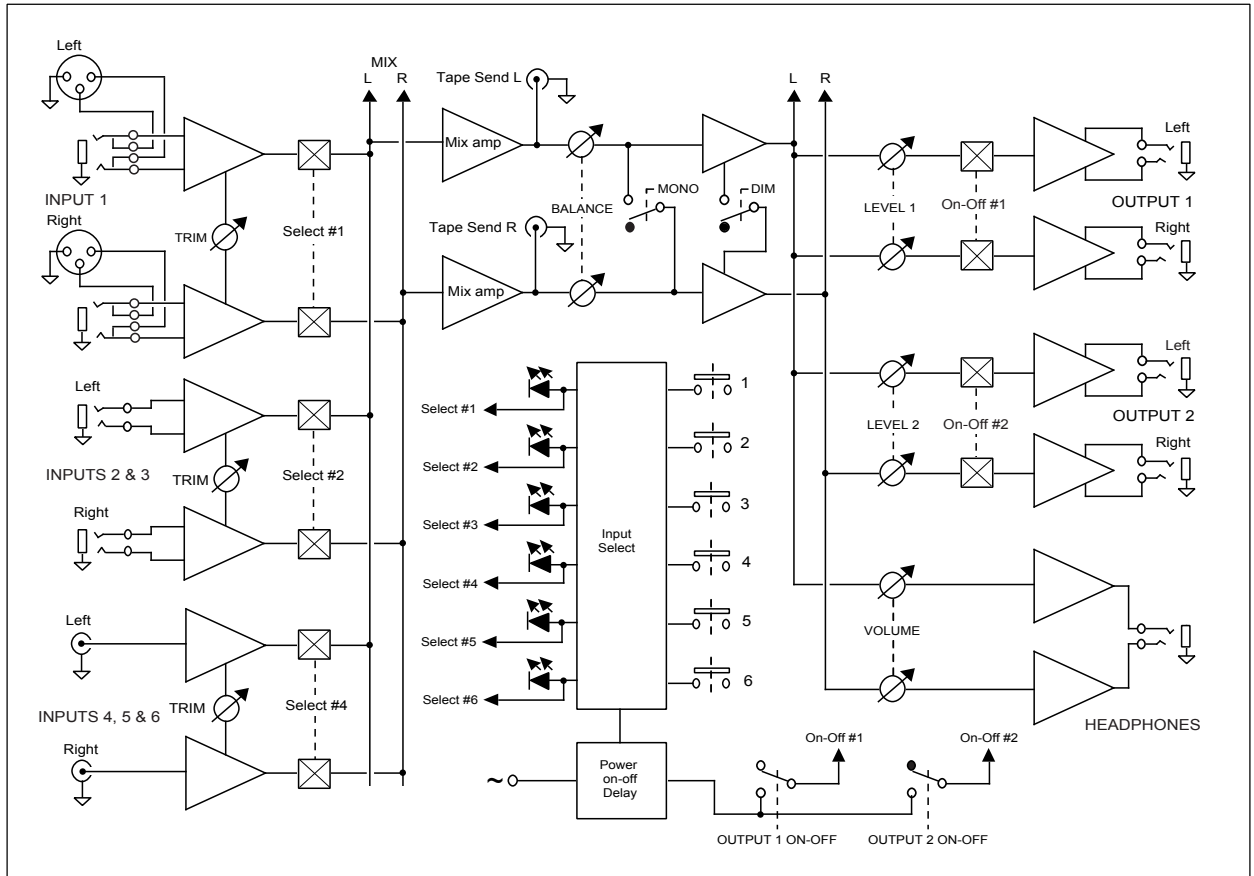

DIMENSIONS

