
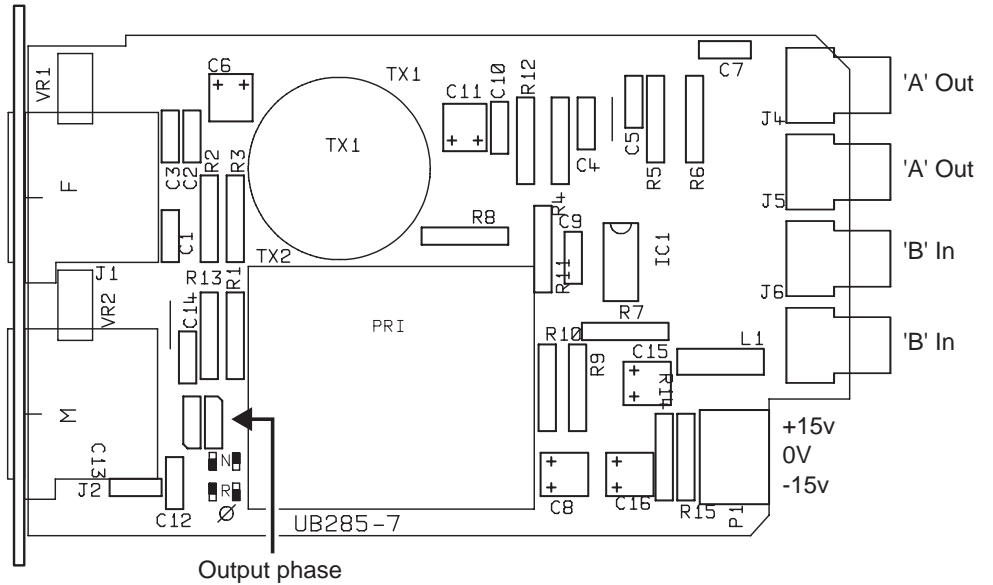


## CONNECTIONS AND CONTROLS

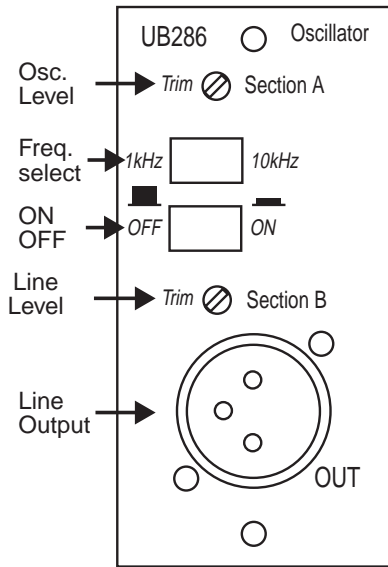


TX 1 is not fitted to the UB285. Input is electronically balanced


## BLOCK DIAGRAM

### UB 285

Section A - IN

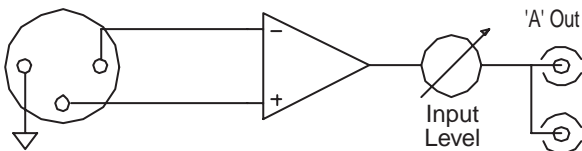


Section B - OUT

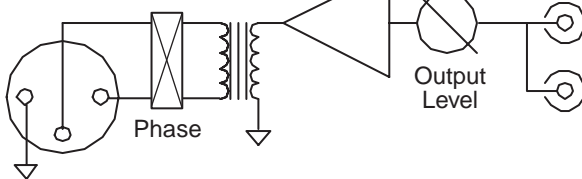


### UB 285 T

Section A - IN

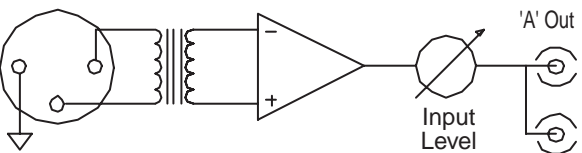

Section B - OUT

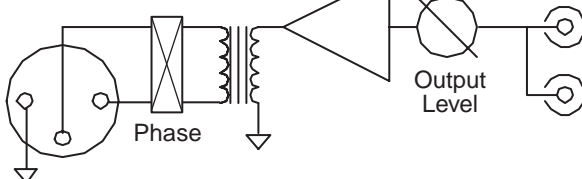

## SPECIFICATIONS

### A and B SECTION

Frequency Response +0/-0.5dB, 20Hz to 20kHz  
 Signal to Noise Ratio < -90dBu  
 THD < 0.1% 1kHz, +4dBu

Gain range A = Off to 0dB  
 B = Off to +12dB  
 Input impedance A = 10k balanced  
 B = 47k

Max input level +20dBu  
 Nominal output level A = -7dBu  
 B = +4dBu  
 Max Output level +20dBu  
 Output impedance A = 1k unbalanced  
 B = 20R balanced

POWER SUPPLY +/-15V @ 20mA



In keeping with our policy of continuous improvement LA Audio reserves the right to alter specifications without prior notice. Manufactured in the UK by LA Audio, 6-24 Southgate Road, London, N1 3JJ.

Tel: +44 (0)207 923 7447, FAX: +44 (0)207 241 3644. Web: [www.laaudio.co.uk](http://www.laaudio.co.uk). email: [sales@laaudio.co.uk](mailto:sales@laaudio.co.uk)

An SCV International Group Company